



TEHNIČKI LIST | Technical Data Sheet

LNK regal H60

LNK cable tray H60

Tip Type	Širina Width <i>W</i>	Visina Height <i>H</i>	Debljina Thickness <i>t</i>	Dužina Length <i>L</i>	Dozvoljeno opterećenje Allowed load 1,0m 2,0m 3,0m <i>kN/m</i>	Šifra artikla Article
LNK 100/60	100	60	1,5	3.000	3,50 2,11 1,33	1310060
LNK 200/60	200	60	1,5	3.000	3,50 2,09 1,23	1320060
LNK 300/60	300	60	1,5	3.000	3,32 2,10 1,25	1330060
LNK 400/60	400	60	1,5	3.000	3,24 2,01 1,21	1340060
LNK 500/60	500	60	1,5	3.000	3,18 2,01 1,18	1350060
LNK 600/60	600	60	1,5	3.000	3,25 1,97 1,24	1360060

LNK REGAL 100 H60 | LNK cable tray 100 H60

OSNOVNI PODACI | GENERAL DATA

- Šifra artikla | Item number

1310060

- Proizvođač | Manufacturer

ITS Kovačević d.o.o.

- Dimenzije | Dimensions

60x100x3000

- Materijal | Material

pocinkovani lim | Galvanized steel

- Površina | Surface Protection

hladno cinkovano | Electro Galvanized

- Jedinica mere | Unit of Measure

metar | Meter




DIMENZIJE | DIMENSIONS

- Dužina | Length - **3,000 mm**
- Širina | Width - **100 mm**
- Visina | Height - **60 mm**
- Debljina lima | Sheet Thickness - 1.50 mm

TEHNIČKI PODACI | TECHICAL DATA

- Vrsta spojnice | Coupling Type - **PNK spojnica sa nazubljenom navrtkom** | PCT connector (carriage bolt with serrated nut)
- Način kačenja | Mounting Type - **Plafonsko ili zidno** | **Ceiling or wall mounting**
- Korisna dužina | Usable Length - **3,000 mm**

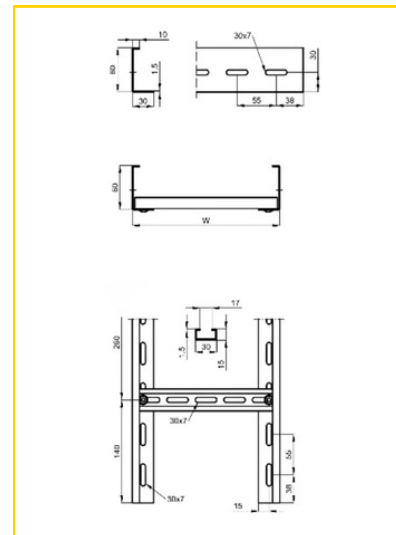

TEST OPTEREĆENJA | LOAD TEST

- Rastojanje između oslonaca min. | Support Spacing (min.) - **1.0 m**
- Rastojanje između oslonaca maks. | Support Spacing (max.) - **3.0 m**
- Izmerena nosivost na konzolama na 1,0m | Load Capacity on Brackets at 1.0m - **3.50 kN/m**
- Izmerena nosivost na konzolama na 2,0m | Load Capacity on Brackets at 2.0m - **2.11 kN/m**
- Izmerena nosivost na konzolama na 3,0m | Load Capacity on Brackets at 3.0m - **1.33 kN/m**

LNK REGAL 200 H60 | LNK cable tray 200 H60

OSNOVNI PODACI | GENERAL DATA

- Šifra artikla | Item number

1320060

- Proizvođač | Manufacturer

ITS Kovačević d.o.o.

- Dimenzije | Dimensions

60x200x3000

- Materijal | Material

pocinkovani lim | Galvanized steel

- Površina | Surface Protection

hladno cinkovano | Electro Galvanized

- Jedinica mere | Unit of Measure

metar | Meter




DIMENZIJE | DIMENSIONS

- Dužina | Length - **3,000 mm**
- Širina | Width - **200 mm**
- Visina | Height - **60 mm**
- Debljina lima | Sheet Thickness - 1.50 mm

TEHNIČKI PODACI | TECHICAL DATA

- Vrsta spojnice | Coupling Type - **PNK spojnica sa nazubljenom navrtkom** | PCT connector (carriage bolt with serrated nut)
- Način kačenja | Mounting Type - **Plafonsko ili zidno** | **Ceiling or wall mounting**
- Korisna dužina | Usable Length - **3,000 mm**

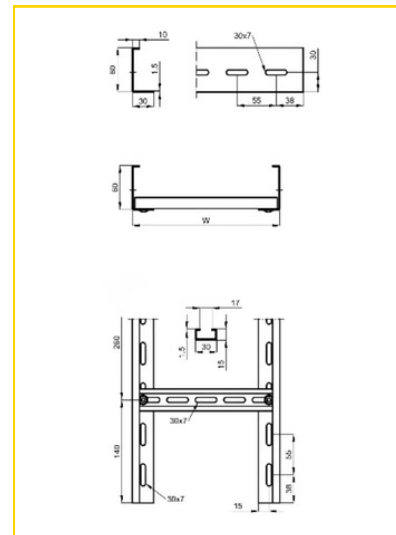

TEST OPTEREĆENJA | LOAD TEST

- Rastojanje između oslonaca min. | Support Spacing (min.) - **1.0 m**
- Rastojanje između oslonaca maks. | Support Spacing (max.) - **3.0 m**
- Izmerena nosivost na konzolama na 1,0m | Load Capacity on Brackets at 1.0m - **3.50 kN/m**
- Izmerena nosivost na konzolama na 2,0m | Load Capacity on Brackets at 2.0m - **2.09 kN/m**
- Izmerena nosivost na konzolama na 3,0m | Load Capacity on Brackets at 3.0m - **1.23 kN/m**

LNK REGAL 300 H60 | LNK cable tray 300 H60

OSNOVNI PODACI | GENERAL DATA

- Šifra artikla | Item number

1330060

- Proizvođač | Manufacturer

ITS Kovačević d.o.o.

- Dimenzije | Dimensions

60x300x3000

- Materijal | Material

pocinkovani lim | Galvanized steel

- Površina | Surface Protection

hladno cinkovano | Electro Galvanized

- Jedinica mere | Unit of Measure

metar | Meter




DIMENZIJE | DIMENSIONS

- Dužina | Length - **3,000 mm**
- Širina | Width - **300 mm**
- Visina | Height - **60 mm**
- Debljina lima | Sheet Thickness - 1.50 mm

TEHNIČKI PODACI | TECHICAL DATA

- Vrsta spojnice | Coupling Type - **PNK spojnica sa nazubljenom navrtkom** | PCT connector (carriage bolt with serrated nut)
- Način kačenja | Mounting Type - **Plafonsko ili zidno** | **Ceiling or wall mounting**
- Korisna dužina | Usable Length - **3,000 mm**

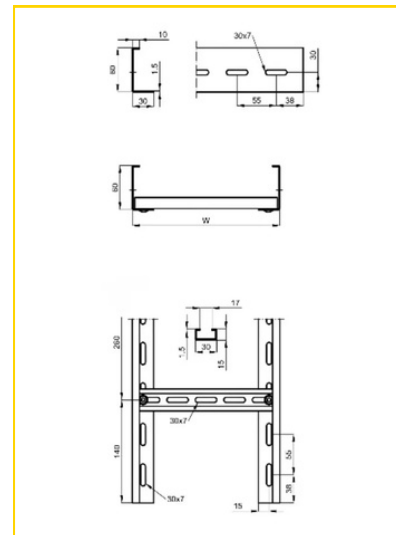

TEST OPTEREĆENJA | LOAD TEST

- Rastojanje između oslonaca min. | Support Spacing (min.) - **1.0 m**
- Rastojanje između oslonaca maks. | Support Spacing (max.) - **3.0 m**
- Izmerena nosivost na konzolama na 1,0m | Load Capacity on Brackets at 1.0m - **3.32 kN/m**
- Izmerena nosivost na konzolama na 2,0m | Load Capacity on Brackets at 2.0m - **2.10 kN/m**
- Izmerena nosivost na konzolama na 3,0m | Load Capacity on Brackets at 3.0m - **1.25 kN/m**

LNK REGAL 400 H60 | LNK cable tray 400 H60

OSNOVNI PODACI | GENERAL DATA

- Šifra artikla | Item number

1340060

- Proizvođač | Manufacturer

ITS Kovačević d.o.o.

- Dimenzije | Dimensions

60x400x3000

- Materijal | Material

pocinkovani lim | Galvanized steel

- Površina | Surface Protection

hladno cinkovano | Electro Galvanized

- Jedinica mere | Unit of Measure

metar | Meter




DIMENZIJE | DIMENSIONS

- Dužina | Length - **3,000 mm**
- Širina | Width - **400 mm**
- Visina | Height - **60 mm**
- Debljina lima | Sheet Thickness - 1.50 mm

TEHNIČKI PODACI | TECHICAL DATA

- Vrsta spojnice | Coupling Type - **PNK spojnica sa nazubljenom navrtkom** | PCT connector (carriage bolt with serrated nut)
- Način kačenja | Mounting Type - **Plafonsko ili zidno** | **Ceiling or wall mounting**
- Korisna dužina | Usable Length - **3,000 mm**

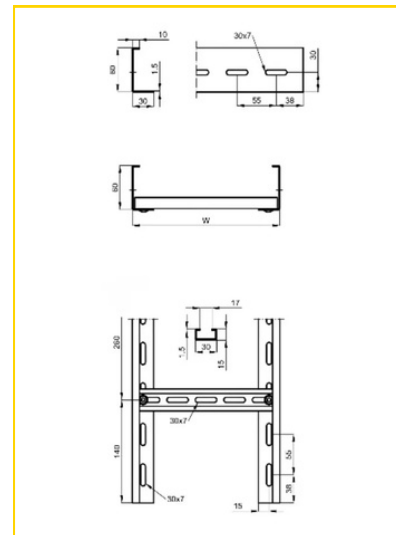

TEST OPTEREĆENJA | LOAD TEST

- Rastojanje između oslonaca min. | Support Spacing (min.) - **1.0 m**
- Rastojanje između oslonaca maks. | Support Spacing (max.) - **3.0 m**
- Izmerena nosivost na konzolama na 1,0m | Load Capacity on Brackets at 1.0m - **3.24 kN/m**
- Izmerena nosivost na konzolama na 2,0m | Load Capacity on Brackets at 2.0m - **2.01 kN/m**
- Izmerena nosivost na konzolama na 3,0m | Load Capacity on Brackets at 3.0m - **1.21 kN/m**

LNK REGAL 500 H60 | LNK cable tray 500 H60

OSNOVNI PODACI | GENERAL DATA

- Šifra artikla | Item number

1350060

- Proizvođač | Manufacturer

ITS Kovačević d.o.o.

- Dimenzije | Dimensions

60x500x3000

- Materijal | Material

pocinkovani lim | Galvanized steel

- Površina | Surface Protection

hladno cinkovano | Electro Galvanized

- Jedinica mere | Unit of Measure

metar | Meter




DIMENZIJE | DIMENSIONS

- Dužina | Length - **3,000 mm**
- Širina | Width - **500 mm**
- Visina | Height - **60 mm**
- Debljina lima | Sheet Thickness - 1.50 mm

TEHNIČKI PODACI | TECHICAL DATA

- Vrsta spojnice | Coupling Type - **PNK spojnica sa nazubljenom navrtkom** | PCT connector (carriage bolt with serrated nut)
- Način kačenja | Mounting Type - **Plafonsko ili zidno** | **Ceiling or wall mounting**
- Korisna dužina | Usable Length - **3,000 mm**

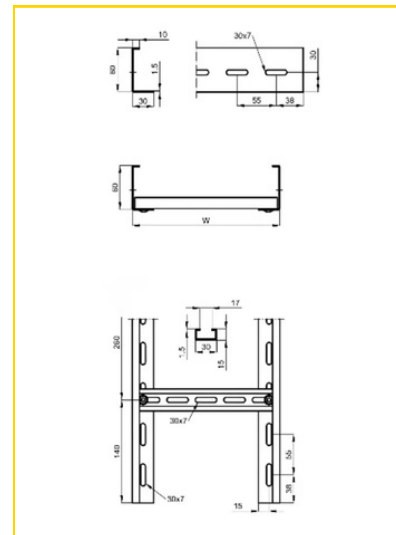

TEST OPTEREĆENJA | LOAD TEST

- Rastojanje između oslonaca min. | Support Spacing (min.) - **1.0 m**
- Rastojanje između oslonaca maks. | Support Spacing (max.) - **3.0 m**
- Izmerena nosivost na konzolama na 1,0m | Load Capacity on Brackets at 1.0m - **3.18 kN/m**
- Izmerena nosivost na konzolama na 2,0m | Load Capacity on Brackets at 2.0m - **2.01 kN/m**
- Izmerena nosivost na konzolama na 3,0m | Load Capacity on Brackets at 3.0m - **1.18 kN/m**

LNK REGAL 600 H60 | LNK cable tray 600 H60

OSNOVNI PODACI | GENERAL DATA

- Šifra artikla | Item number

1360060

- Proizvođač | Manufacturer

ITS Kovačević d.o.o.

- Dimenzije | Dimensions

60x600x3000

- Materijal | Material

pocinkovani lim | Galvanized steel

- Površina | Surface Protection

hladno cinkovano | Electro Galvanized

- Jedinica mere | Unit of Measure

metar | Meter




DIMENZIJE | DIMENSIONS

- Dužina | Length - **3,000 mm**
- Širina | Width - **600 mm**
- Visina | Height - **60 mm**
- Debljina lima | Sheet Thickness - 1.50 mm

TEHNIČKI PODACI | TECHICAL DATA

- Vrsta spojnice | Coupling Type - **PNK spojnica sa nazubljenom navrtkom** | PCT connector (carriage bolt with serrated nut)
- Način kačenja | Mounting Type - **Plafonsko ili zidno** | **Ceiling or wall mounting**
- Korisna dužina | Usable Length - **3,000 mm**

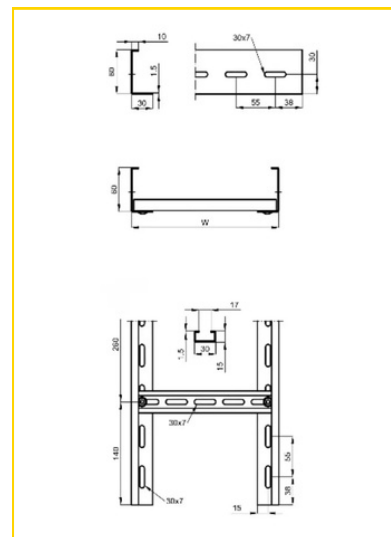

TEST OPTEREĆENJA | LOAD TEST

- Rastojanje između oslonaca min. | Support Spacing (min.) - **1.0 m**
- Rastojanje između oslonaca maks. | Support Spacing (max.) - **3.0 m**
- Izmerena nosivost na konzolama na 1,0m | Load Capacity on Brackets at 1.0m - **3.25 kN/m**
- Izmerena nosivost na konzolama na 2,0m | Load Capacity on Brackets at 2.0m - **1.97 kN/m**
- Izmerena nosivost na konzolama na 3,0m | Load Capacity on Brackets at 3.0m - **1.24 kN/m**